


DATE CREATED: 01 / 06 / 2024

SCREEN REPAIR TAPE – IS 51332 V

400 MICRON

PRODUCT DESCRIPTION

IS 51332 V Polyester Mesh screen repair tape is a specialized adhesive tape designed to patch up small holes and tears in window screens. This affordable and hassle-free solution requires no specialized skills or tools. Made of high-quality fiberglass material, the tape is lightweight, waterproof, durable, and tear-resistant, making it suitable for any screen surface.

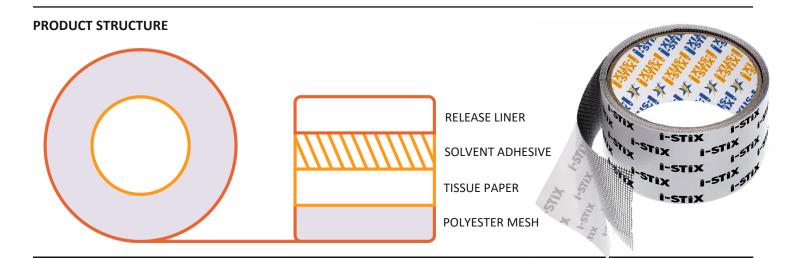

PRODUCT FEATURE

- Strong Adhesive: Ensures the tape stays securely on the screen for a long time.
- High-Quality Material: Made of durable, lightweight, and waterproof fiberglass.
- Easy Installation: Simply cut to size, remove the liner, and stick to the damaged area.
- Customizable Size: The tape comes in a roll and can be cut to fit specific repair needs.
- Cost-Effective Solution: Saves money and energy by repairing rather than replacing the entire screen.

PRODUCT APPLICATION

- **Screen Doors:** Effective for patching up screen doors.
- Window Screens: Ideal for repairing small holes and tears.
- Patio Door Nets: Suitable for fixing damage on patio door nets.
- Additional Uses: Can be used for tent mesh, pool screens, RV screens, camping tarpaulins, and more.

PHYSICAL PROPERTIES

CHARACTERISTIC	UNIT	VALUE
COLOR	-	Black
BACKING	-	Poly Mesh & Tissue Paper
ADHESIVE TYPE	-	Solvent Based
THICKNESS	MICRON	400 ± 0.05
INITIAL TACK	STEEL BALL NO.	≥ 10
TENSILE STRENGTH	N/25MM	≥ 12
HOLDING POWER	Н	≥ 10
PEEL ADHESION	N/25MM	≥ 18
ELONGATION	%	≥ 5
TEMPRATURE RESISTANT	°C	0 – 120

Information in the above sheet is the average value of the tests, it should not be taken as the exact values of every single product. Customers have the obligation to check whether the product is suitable for their own applications.

STORAGE AND USAGE

Tape should be stored in dry, cool, shelter area and avoid direct sunlight, storage temperature under 40°C under correct storage conditions maintains its characteristics for two years.

NOTICE

- Please try a sample and make sure the tape is suitable for the application before use it.
- Customers who buy the jumbo rolls should stop the re-winding and slitting once find that there has quality problem with the jumbo. Contact us right away. If customers re-wind/cut the problematic jumbo into log/finished rolls, Instabiz Solutions India Pvt. Ltd. will not response to make any indemnity.
- Ideal tape application temperature is 8 to 38 Celsius. It is not suggested to use the tape below zero Celsius, because the adhesive will become too firm to adhere readily. However, once customers insist on using the tape under such a low temperature, please contact us, Instabiz Solutions India Pvt. Ltd. will adjust the adhesive, but Instabiz Solutions India Pvt. Ltd. doesn't guarantee anything.
- Firm application pressure helps develop better adhesive contact and improves bond strength, the bonding surfaces must be clean, dry and well unified. Seal completely when not use the tape, avoid expose the tape in the sunlight.
- Expiry date: Original packaging, 23 C & 60% humidity, 12 months after production date. If product is not kept under such temperature and humidity, jumbo/log rolls should be finished within four months, finished rolls should be finished within one month.
- All Instabiz Solutions India Pvt. Ltd. products are strict inspected before sent to customers, but the applications might be different between different customers, there may exist factors which
 are beyond Instabiz Solutions India Pvt. Ltd. knowledge and control, so customers should check the quality of every order before use the tape. If customers use the product without inspection,
 they must be responsible for the potential quality problems and economic loss. If the product is proved to be defective, the exclusive remedy, at Instabiz Solutions India Pvt. Ltd. option, shall be
 to refund the purchase price of or replace the problematic product.