


KRAFT PAPER TAPE – IS 52214 V

120 MICRON

PRODUCT DESCRIPTION

IS 52214 V Biodegradable Kraft Paper Tape is a highly durable, moisture-resistant tape designed for applications requiring strong adhesion and reduced packing material weight. Approved by the U.S. Postal Service and UPS, this pressure-sensitive tape is crafted from porous Kraft paper coated with a robust synthetic Hotmelt adhesive.

PRODUCT STRUCTURE

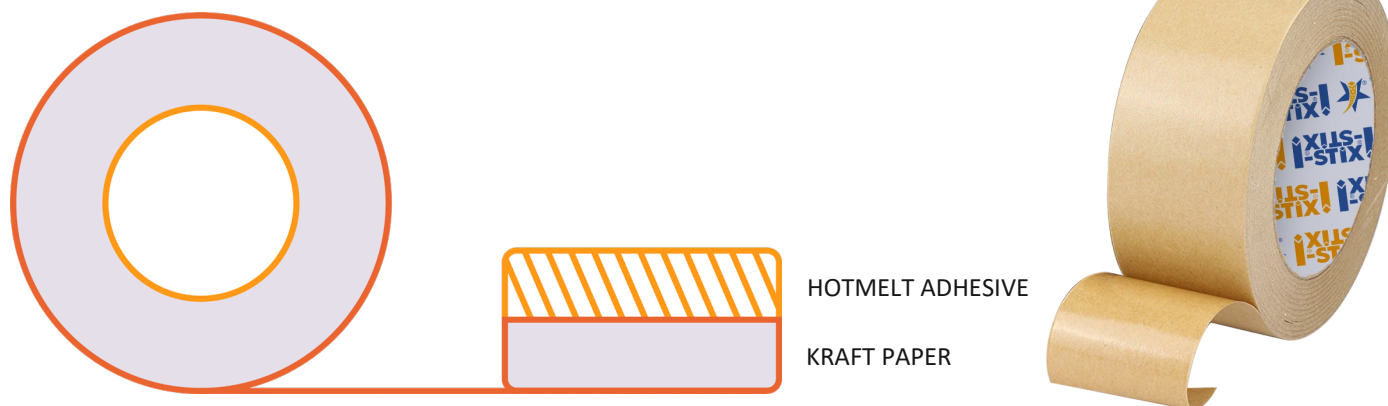

PRODUCT FEATURE

- **High Tear Resistance:** Ensures durability and strength for demanding packaging needs.
- **Eco-Friendly:** Made from biodegradable materials with a super-strong rubber adhesive.
- **Easy to Tear:** Facilitates quick and effortless use.
- **Easy to Mark:** Allows for easy labelling and writing on the tape.
- **Odourless:** Ideal for companies shipping food products.
- **Non-Sticky:** Convenient to handle without leaving residue.

PRODUCT APPLICATION

- **Carton Sealing:** Securely seals boxes for shipping and storage.
- **Packing:** Suitable for heavy-duty packing needs.
- **Splicing and Tabbing:** Effective for joining and labelling materials.
- **Freezer Tape:** Performs well in low-temperature environments.
- **Silk Screening:** Useful in the silk screening process for securing materials.
- **Picture Framing:** Helps in the framing process to secure and protect artwork.
- **Decorative Use:** Can be used for gift wrapping, creating corporate cards, wedding invitations, and more.

PHYSICAL PROPERTIES

CHARACTERISTIC	UNIT	VALUE
COLOR	-	Brown
BACKING	-	Kraft Paper
ADHESIVE TYPE	-	Hotmelt Based
THICKNESS	MICRON	120 ± 0.05
INITIAL TACK	STEEL BALL NO.	# 15
TENSILE STRENGTH	N/25MM	≥ 60
HOLDING POWER	H	≥ 2
PEEL ADHESION	N/25MM	≥ 12
ELONGATION	%	≥ 5
TEMPRATURE RESISTANT	°C	0 – 50

Information in the above sheet is the average value of the tests, it should not be taken as the exact values of every single product. Customers have the obligation to check whether the product is suitable for their own applications.

STORAGE AND USAGE

Tape should be stored in dry, cool, shelter area and avoid direct sunlight, storage temperature under 40°C under correct storage conditions maintains its characteristics for two years.

NOTICE

- Please try a sample and make sure the tape is suitable for the application before use it.
- Customers who buy the jumbo rolls should stop the re-winding and slitting once find that there has quality problem with the jumbo. Contact us right away. If customers re-wind/cut the problematic jumbo into log/finished rolls, Instabiz Solutions India Pvt. Ltd. will not response to make any indemnity.
- Ideal tape application temperature is 8 to 38 Celsius. It is not suggested to use the tape below zero Celsius, because the adhesive will become too firm to adhere readily. However, once customers insist on using the tape under such a low temperature, please contact us, Instabiz Solutions India Pvt. Ltd. will adjust the adhesive, but Instabiz Solutions India Pvt. Ltd. doesn't guarantee anything.
- Firm application pressure helps develop better adhesive contact and improves bond strength, the bonding surfaces must be clean, dry and well unified. Seal completely when not use the tape, avoid expose the tape in the sunlight.
- Expiry date: Original packaging, 23 C & 60% humidity, 12 months after production date. If product is not kept under such temperature and humidity, jumbo/log rolls should be finished within four months, finished rolls should be finished within one month.
- All Instabiz Solutions India Pvt. Ltd. products are strict inspected before sent to customers, but the applications might be different between different customers, there may exist factors which are beyond Instabiz Solutions India Pvt. Ltd. knowledge and control, so customers should check the quality of every order before use the tape. If customers use the product without inspection, they must be responsible for the potential quality problems and economic loss. If the product is proved to be defective, the exclusive remedy, at Instabiz Solutions India Pvt. Ltd. option, shall be to refund the purchase price of or replace the problematic product.

info@instabizsolutions.com

www.instabizsolutions.com