


FLOOR GUARD TAPE – IS 51421 V

60 MICRON

PRODUCT DESCRIPTION

IS 51421 V Floor Guard tape is made from tear-resistant polyethylene, it withstands abrasion and impact. Its water-based adhesive ensures a firm hold while allowing clean removal without residue or surface damage. Designed for temporary floor protection, this tape adheres securely to marble, ceramic, wood, and other surfaces, preventing scratches, stains, and damage during construction and renovation.

PRODUCT STRUCTURE

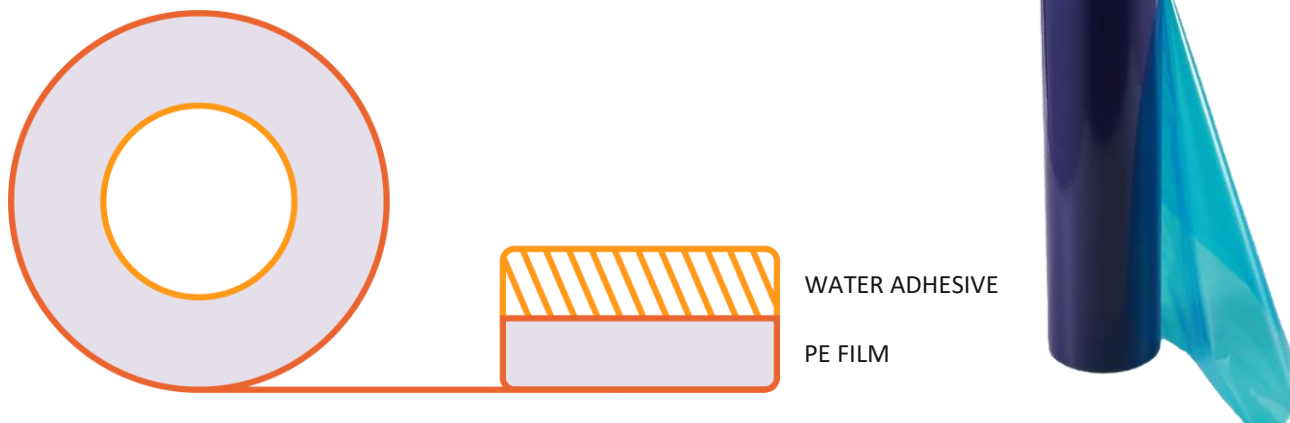

PRODUCT FEATURE

- **Clean Removal:** Designed for residue-free removal.
- **Cross-Linked Formulation:** Prevents gum-transfer and peel-gain.
- **High-Speed Lamination:** Ensures uniform and stable applications.
- **High-Tack Adhesive:** Provides excellent adhesion to multiple floor surfaces.
- **Easy Application and Removal:** Simple to apply and peel off, leaving no residue.
- **Durable Construction:** Made from strong materials like polyethylene, resistant to tearing, punctures, and abrasions.

PRODUCT APPLICATION

- **Carpet Securing:** Keeps carpets and floor coverings in place during events.
- **Furniture and Appliance Moving:** Prevents floor damage when moving heavy items.
- **Interior Works:** Shields floors during painting, sanding, or installation of new fixtures.
- **Remodeling Projects:** Safeguards various flooring types from damage during renovation.
- **Construction Sites:** Protects flooring from dirt, spills, and heavy equipment during construction.
- **Event Venues and Exhibition Spaces:** Protects floors from heavy foot traffic, equipment, and installations.

PHYSICAL PROPERTIES

CHARACTERISTIC	UNIT	VALUE
COLOR	-	Blue / Transparent
BACKING	-	Polyethylene Film
ADHESIVE TYPE	-	Based
THICKNESS	MICRON	60 ± 0.05
INITIAL TACK	STEEL BALL NO.	# 0
TENSILE STRENGTH	N/25MM	≥ 0
HOLDING POWER	H	≥ 0
PEEL ADHESION	N/25MM	≥ 0
ELONGATION	%	≥ 0
TEMPRATURE RESISTANT	°C	-0 – 0
BREAKDOWN VOLTAGE	KV	0
DYNAMIC SHEAR STRENGHT		

Information in the above sheet is the average value of the tests, it should not be taken as the exact values of every single product. Customers have the obligation to check whether the product is suitable for their own applications.

STORAGE AND USAGE

Tape should be stored in dry, cool, shelter area and avoid direct sunlight, storage temperature under 40°C under correct storage conditions maintains its characteristics for two years.

NOTICE

- Please try a sample and make sure the tape is suitable for the application before use it.
- Customers who buy the jumbo rolls should stop the re-winding and slitting once find that there has quality problem with the jumbo. Contact us right away. If customers re-wind/cut the problematic jumbo into log/finished rolls, Instabiz Solutions India Pvt. Ltd. will not response to make any indemnity.
- Ideal tape application temperature is 8 to 38 Celsius. It is not suggested to use the tape below zero Celsius, because the adhesive will become too firm to adhere readily. However, once customers insist on using the tape under such a low temperature, please contact us, Instabiz Solutions India Pvt. Ltd. will adjust the adhesive, but Instabiz Solutions India Pvt. Ltd. doesn't guarantee anything.
- Firm application pressure helps develop better adhesive contact and improves bond strength, the bonding surfaces must be clean, dry and well unified. Seal completely when not use the tape, avoid expose the tape in the sunlight.
- Expiry date: Original packaging, 23 C & 60% humidity, 12 months after production date. If product is not kept under such temperature and humidity, jumbo/log rolls should be finished within four months, finished rolls should be finished within one month.
- All Instabiz Solutions India Pvt. Ltd. products are strict inspected before sent to customers, but the applications might be different between different customers, there may exist factors which are beyond Instabiz Solutions India Pvt. Ltd. knowledge and control, so customers should check the quality of every order before use the tape. If customers use the product without inspection, they must be responsible for the potential quality problems and economic loss. If the product is proved to be defective, the exclusive remedy, at Instabiz Solutions India Pvt. Ltd. option, shall be to refund the purchase price of or replace the problematic product.

info@instabizsolutions.com

www.instabizsolutions.com